



# UT-Series

*The new benchmark in Undermount Refrigeration*

**Self Powered Truck  
Single Temperature**



- *Whisper-quiet operation*
- *Low fuel consumption*
- *Smaller and lighter*
- *Easy, low-cost installation*
- *Easier service accessibility*
- *Advanced TSR-2 controller*





## Introducing the new UT-Series

*The new Thermo King UT-800 and UT-1200 have been designed with both you and the environment in mind. These units are not only kind to the environment, but also kind to your pocket. Specifically developed for under-mount applications on trucks and drawbar trailers, the units have undergone intensive testing at our state-of-the-art global research and development centres, so it goes without saying that when you deal with Thermo King you are dealing with the industry benchmark in reliability, performance, durability and efficiency.*



### Benefits to you

- Lower fuel consumption
- Smaller and lighter
- Low-cost installation
- Easy service accessibility
- Advanced TSR-2 controller

### Benefits for the environment

- Low fuel consumption
- Reduced engine emissions with GreenTech™ engine
- Reduced R-404 A refrigerant charge
- EMI 2000 hours extended maintenance interval

## Why choose the new UT-Series?

*There's more than one reason why the UT-Series is the solution for you:*

### Lower fuel consumption

- Through extensive development and field experience, Thermo King have found the right balance between system efficiency, fuel consumption and performance in all ambient conditions for both fresh and frozen produce
- Advanced fuel-saving control technology with the new TSR-2 controller means greater fuel efficiency
- An innovative microchannel condenser coil helps to reduce fuel consumption by over 10% compared to a conventional tube and fin condenser coil

### Lower life cycle costs

- The new TSR-2 controller allows optimum management of all functions within the unit, helping you to lower costs with each load
- The extended maintenance interval EMI 2000, means that there is now up to 2000 hour intervals between engine oil and filter changes. This will help to lower maintenance costs significantly
- A 19cm reduction in length and a 20kg reduction in weight results in reduced vehicle weight, increased vehicle payload and further fuel efficiency
- All new UT-Series units come with a full 2-year warranty\*

\*2nd year warranty coverage subject to mid-term inspection.

### Easy to use and service

- The new and intuitive TSR-2 controller, means error free operation is now simpler than ever. By simply using the symbolic display, errors can become a thing of the past
- Low level alerts for oil and coolant
- Easily programmable service intervals and scheduled maintenance reminders
- Easy service accessibility to electrical and engine components



### Reduced emissions & waste

- With the introduction of the GreenTech™ engine you can be assured that the UT-Series is playing its part in keeping the environment safe. These engines are by far the cleanest on the market, significantly exceeding all EU requirements
- Large reduction of oil, filter and coolant waste through EMI 2000
- 99.7% of the unit material is recyclable
- The UT-Series range is manufactured at Thermo King's state-of-the-art facility in Galway, Ireland, which has held ISO 14001 certification for Environmental Management since 2000

### Capacities for every requirement

- Whatever your capacity requirements, we have a solution that suits your usage
- Cut down on energy waste and save operating costs
- Capacities from 8500 W to 11200 W at 0°C
- Capacities from 5100 W to 6700 W at -20°C
- All units are thoroughly tested up to 50°C ambient temperatures

## Quality you can rely on

Number one for efficiency, reliability and durability – The UT-Series from Thermo King was born from years of extensive research, testing and experience; imitated by many, perfected only by Thermo King.

At every stage of the development, the UT-Series units have undergone rigorous testing procedures in cutting-edge R&D centres worldwide. This includes nonstop endurance tests, accelerated life tests and exposure to extreme operating environments. All of these measures ensure that you can rely on your UT-Series refrigeration unit for any type of application, in all conditions, and without compromise.

### State of the art GreenTech™ engine

- Low emissions
- High performance
- Increased lifespan
- Reduced maintenance

### Extended Maintenance Interval: EMI 2000

- 2000 hours / 24 months oil change intervals
- Reduced environmental impact with less spillage and less waste
- Lower maintenance costs versus competitor models



## Scroll compressor

### Technological advantages


- High efficiency means high capacity
- Greater capacity means faster pulldown and temperature recovery
- 87% fewer moving parts means high reliability and longer life
- Lower fuel consumption means more operating profit
- The scroll set to optimise the high ambient performance is cooled through liquid injection

### Environmental advantages

- Less fuel required means less fuel consumed
- Less fuel consumed means lower diesel emissions
- Whisper-quiet operation means lower noise emissions
- Chlorine-free R-404 A means zero ozone depletion

### Condenser coils

- A larger condenser enables high temperature capability, further capacity and more efficiency, all with whisper-quiet operation
- The all new microchannel condenser coils provide a number of additional performance benefits which will ensure operating profits and reliability are enhanced. These features include:
  - Reduced fuel consumption
  - Reduced engine and compressor temperatures
  - Reduced refrigerant charge
  - Reduced weight
  - Increased recyclability

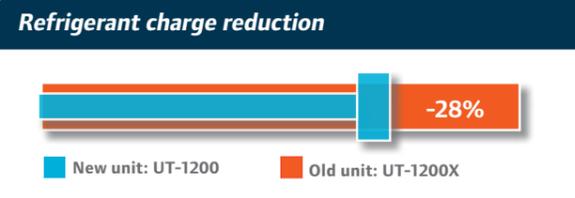

### Corrosion prevention

Due to the extreme environments in which the UT-Series will operate, corrosion prevention was a key priority in the designing of these units. Some of these world-class leading features include:

- An automotive grade electrocoated (e-coated) frame
- An all aluminum microchannel coil to eliminate galvanic corrosion
- Extensive use of painted aluminum and galvanised steel for skins and other components

## The new TSR-2 controller, easy to use, hard to beat!

TruckSmartReefer2

Install confidence amongst your fleet and your drivers with the easy to use TSR-2 controller and display for the UT-Series units. This innovative symbolic controller means your drivers can adjust and set the refrigeration unit with ease. Eliminate all doubt with the step-by-step easy to use interfaces.

### New intuitive interface

Make operator errors a thing of the past with the new TSR-2 in-cab display. This easy to use interface is the perfect solution, regardless of what language you speak. All information is displayed with easy to understand symbols and is effortless to navigate. For those who need that little bit extra, the graphic TSR-2 Premium in-cab display is also available. With 21 languages it is easy to navigate and to use, it couldn't be simpler!

### Fuel savings

The TSR-2 controller includes features that improve fuel savings such as:

- Cycle-Sentry™ mode
- Economy mode
- Electronic door switch input

### Improved diagnostics with ServiceWatch™

Clearer diagnostics with ServiceWatch™ make it a pleasure to use for service technicians. Potential problems become easier to understand and response times are shortened significantly. The built-in preventative maintenance logger is a recorder that provides improved diagnostics and keeps track of all system performance and functionality. By recording all operational parameters, service diagnostics are significantly improved, ensuring service technicians have reliable and valuable information to hand at all times.



TSR-2 Standard in-cab display



TSR-2 Premium in-cab display

### Easy-to-read LED display

The new LED display is bright and clear, providing better visibility in all light conditions. It also functions perfectly in all ambient temperatures.

### Enhanced safety and security

We at Thermo King understand the importance of transportation and protection of your consignment. With the TSR-2 controller on board, you can avail of the enhanced features that will ensure the safe passage of your goods:

- Keypad with lock-out
- Phase correction
- Diesel/electric auto switching
- Set-point warning
- Oil and coolant level alerts
- Tiered security access levels for appropriate personnel
- Diesel engine and electric standby hour meter display
- DAS (Data Acquisition System) and TracKing™ compatibility

# The GreenTech™ Engine from Thermo King

## Low emissions, high performance



The UT-Series truck refrigeration units are equipped with the class-leading range of GreenTech™ engines from Thermo King. These engines drastically reduce emissions, waste, and noise pollution, exceeding all known requirements, including the most stringent EU standards.

When you see the GreenTech™ name and symbol, you know at a glance that you are looking at refrigeration units that contain the cleanest engines on the market today. Performance has also been enhanced; GreenTech™ engines are more powerful and cause less stress to components. It is the easy choice for you and the best choice for the environment. Make sure you are doing your bit for the environment and do not take less than GreenTech™.



### Engine life

The engine used for the UT-Series is more powerful, than any other on the market; even running at no more than 80% of its maximum output. This means, both oil and coolant temperatures are reduced greatly, resulting in less component stress and engine wear.

Longer engine life = higher savings.


### Bio-fuel compatibility

All new GreenTech™ engines are approved for use with B5 fuel (5% bio/95% petroleum diesel) with no change in maintenance schedules. Fuels with higher bio-diesel content (B6 up to B100) require shorter intervals between oil changes and injector servicing. Contact your Thermo King representative for more information.

### Extended maintenance interval: EMI 2000

- 2000 hours / 24 months oil filter change intervals
- Reduced environmental impact with less spillage and less waste
- Lower maintenance costs compared with competitor models

**Emissions (Particulate Matter):  
Competitor vs UT-Series Engines**

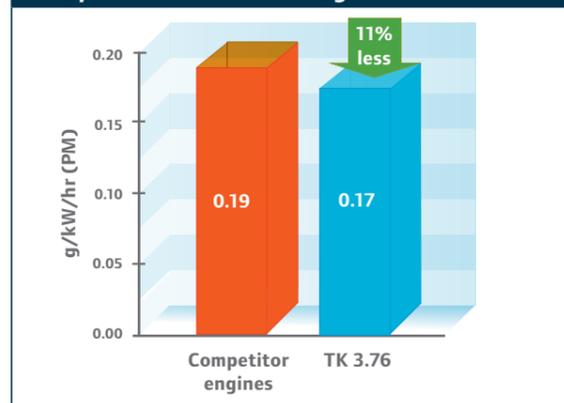

## Whisper-quiet operation

In times where noise pollution is a growing concern, Whisper-quiet operation has never been more important. Those distributing to urban and noise sensitive areas will welcome this introduction, particularly for nighttime deliveries.

It is with this in mind that the UT-800 and the UT-1200 were designed. We realised, that not only did we have to pay attention to containing noise emissions; we also had to look at reducing noise from the source. A considerable amount of components in both units were designed to operate at minimum noise levels while still maintaining the integrity of all operations.


### Whisper quiet operation

The belt drive system and fan are positioned at the back of the unit, resulting in a significant decrease in noise levels over other layouts trialled. This, combined with sound-abating technology around critical components, make the UT-800 and UT-1200 significantly quieter than any competitor systems.



### Percentage contribution to noise reduction

- Tuned intake, muffler and exhaust system
- Cyclonic air filter
- Scroll compressor
- Low emission engine
- Noise absorption materials



# Features and Options: Who else offers features like these?

## 1 ThermoKare

ThermoKare offers a comprehensive range of service contract options, helping to manage your maintenance costs and the total life cost of your unit.

## 2 Warranty coverage

2-year warranty coverage on unit and options\*

\*2nd year warranty coverage subject to mid-term inspection



## 3 Cycle-Sentry

This feature stops the engine when refrigeration is not needed and restarts it when refrigeration or battery charge is required

- Fuel and CO<sub>2</sub> savings of up to 80%
- Increased component life
- Reduced maintenance costs

## 4 Extended maintenance interval: EMI 2000

Thermo King EMI 2000 will extend your maintenance interval and reduce your operating costs by:

- Reducing clean-up and disposal costs
- Reducing environmental impact with less spillage and less oil, filter and coolant waste
- Extending engine life with improved, highly efficient filtration

## 5 Thermo King high performance battery

- Incorporates silver-calcium technology to extend service life to over 20% more than conventional batteries

## 6 Thermo King wet cell battery 760CCA

- For customers operating in colder climates, this 760 CCA upgraded wet cell battery delivers greater power than the standard battery

## 7 Thermo King EON battery 880CCA

- Uses Absorbed Glass Mat (AGM) technology with deep-cycle capability and enormous cranking power
- Maintains capacity at extremely low temperatures better than a wet cell battery
- Saves you the time and money of battery replacements through an expected five to eight year service life also backed by our 2-year warranty

## 8 DAS (Data Acquisition System)

This high performance data recorder system records temperatures, set-point, operating modes and external events. An invaluable option for your unit.

- Data can be output to a computer or a printer
- Operates independently of unit controller
- Memory storage for over one year's worth of data
- Assures customer of total quality control
- Provides evidence of correct practice
- Approved to EN-12830, CE mark and IP-65 standards
- Up to 6 independent sensors
- Automatic power-up and shut-off to protect unit battery

## 9 TKDL data capture

- User-friendly temperature recorders for all makes of temperature-controlled equipment
- Simple data offload to PC
- Delivery and journey printouts at the touch of a button
- Approved to EN-12830, CE Mark and IP-65 standards
- Up to 4 independent sensors and up to one year's data storage capacity

## 10 TracKing



Complete load monitoring and fleet tracking at your fingertips.

- Monitors sensitive loads via the web, increases truck asset utilisation, reduces operating costs, enhances customer satisfaction, increases security and reduces insurance risk. TracKing can be sold with a ThermoKare service contract. TracKing is compatible with all Thermo King dataloggers and controllers
- More information at [www.tktracking.com](http://www.tktracking.com)

## 11 Wintrac (data analysis software)

User-friendly software offers fleet managers automatic and customised reporting of temperature and operational data, logged by DAS or transmitted by TracKing.

## 12 Auto phase correction

- Avoids reverse fan rotation while on electric standby
- Protects your load

## 13 Diesel/electric auto switching

- Automatically starts diesel engine if electric standby fails
- Manual override for ferry operation
- Protects the load automatically (without manual intervention)

## 14 Door switches

- Reduces the load temperature rise and saves fuel when doors are opened

## 15 TSR-2 standard in-cab display

- Simplified keypad to reduce the risk of incorrect operation of the system, cutting down on errors
- Visible set-point confirmation for load protection
- Programmable features allow tailoring of operating conditions to each load

## 16 TSR-2 premium in-cab display

- Enables greater control of every aspect of a UT-Series unit
- Allows access to all programmable features on the TSR-2 controller
- Simple and logical menus, easy to read screen and choice of 21 languages

## 17 TherMax system

- Faster defrosts

## 18 Evaporator guard

- Maximum protection against evaporator damage during loading and unloading
- Easy to install
- Exceptional quality

## 19 TSR-2 rear remote control

- Allows easy control of the refrigeration unit from inside the rear of the truck
- Enables energy efficient and safe loading

## 20 Body mount enclosure

- Allows external mounting of in-cab displays on drawbar truck bodies, allowing for easy access

## 21 90L Fuel tank

- Approved for diesel and bio-diesel
- Vibration resistant as per Thermo King standards
- Mechanical fuel gauge with option to upgrade to electrical
- Galvanised drain plug as standard
- Corrosion resistant installation kit (e-coated)

Features and Options		UT-800	UT-1200
<b>LIFE COST MANAGEMENT</b>			
1	ThermoKare service contracts	▲	▲
2	2-year warranty coverage	●	●
3	Cycle-Sentry start/stop control system	●	●
4	EMI 2000 extended maintenance	●	●
5	Thermo King high performance battery	●	●
6	Thermo King battery wet cell 760CCA	△	△
7	Thermo King battery EON 880CCA	△	△
<b>DATA CAPTURE &amp; COMMUNICATIONS</b>			
8	DAS (Data Acquisition System)	▲	▲
9	TKDL data capture	▲	▲
10	TracKing (tracking and load monitoring)	▲	▲
11	Wintrac (data analysis software)	▲	▲
<b>LOAD PROTECTION</b>			
12	Auto phase correction	●	●
13	Diesel/electric auto switching	●	●
14	Door switches	△	△
15	TSR-2 standard in-cab display	●	●
<b>CUSTOMIZATION</b>			
16	TSR-2 premium in-cab display	△	△
17	TherMax system	●	●
18	Evaporator guard	○	▲
19	TSR-2 rear remote control	△	△
20	Body mount enclosure	△	△
21	90L Fuel tank	▲	▲

○ Not Available      ● Standard Feature  
△ Option: Factory Supplied      ▲ Option: Dealer Supplied

### Exclusive driver training software

Avail of Thermo King's Tutor Series with "Professor Kool™". This software provides rapid and effective interactive training to reduce driver error and will ensure you get the best results from the operation of your equipment.



# Specifications

Specifications		UT-800 ES-800	UT-1200 S-3 + S-3	UT-1200 E-EVAP
<b>REFRIGERATION CAPACITY: SYSTEM NET COOLING CAPACITY AT 30°C AMBIENT TEMPERATURE UNDER A.T.P. CONDITIONS</b>				
Return air to evaporator	Celsius	0°C	-20°C	0°C
Capacity on engine power	W	8500	5100	11000
Capacity on electric standby	W	7500	4500	8000
<b>AIRFLOW</b>				
Airflow volume @ 0 Pa static pressure	m <sup>3</sup> /hr	2430	4000	3350
Discharge velocity (air throw)	m/sec	6.5	9.5	6.6
<b>WEIGHT INCLUDING EVAPORATOR</b>				
Model 50: cooling and heating on engine & electric standby operation (unit + evaporator)	kg	530	597	580
<b>ENGINE: LOW EMISSIONS, 3 CYLINDER, LIQUID COOLED</b>				
Model		TK376	TK376	TK376
Rating	kW	14.6	14.6	14.6
Maintenance interval	hrs	2000	2000	2000
<b>COMPRESSOR: ALUMINIUM</b>				
Model		TK06	TK06	TK06
Displacement	cc	98	98	98
<b>ELECTRIC STANDBY OPTION</b>				
Voltage / Phase / Frequency		400V/3Ph/50Hz 230V/3Ph/60Hz	400V/3Ph/50Hz 230V/3Ph/60Hz	400V/3Ph/50Hz 230V/3Ph/60Hz
Rating	kW	7.5	7.5	7.5
<b>REFRIGERANT: R-404A ZERO OZONE DEPLETION POTENTIAL (ODP), INTERNATIONALLY APPROVED</b>				
Charge	kg	4.0	4.6	4.5


Specifications are subject to change without notice.  
Airflow volume and weight will be cumulative. Capacity will depend on unit configuration.







### WARRANTY SUMMARY

Specific terms of the Ingersoll Rand Ltd. 24 month full warranty are available on request (refer to operator's manual). Thermo King excludes liability in contract and tort (including strict liability and negligence) for any special, indirect or consequential damages by reason of the installation or use of any covered product or its mechanical failure.

## Product segmentation

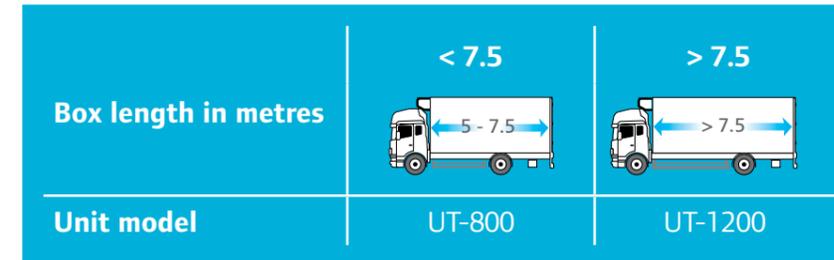

\*The above recommendations are for average running conditions and will be affected by operational factors such as climate temperature and door openings. To ensure the best selection for your application please contact your Thermo King representative.

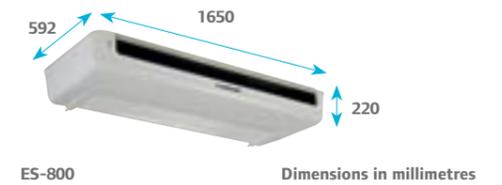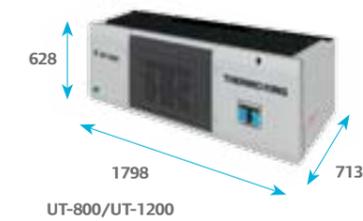

## Thermo King Dealer Service Network



### Anywhere in Europe

- Blanket coverage across Europe
- Open & available 24/7
- Over 300 authorised service points
- 1,300 certified technicians



Thermo King Corporation, a business of Ingersoll Rand – the world leader in creating and sustaining safe, comfortable and energy efficient environments – was founded in 1938 and manufactures transport temperature control systems for a variety of mobile applications, including trailers, truck bodies, buses, shipboard containers and railway cars. The company operates 10 manufacturing facilities and 17 parts distribution centres worldwide. Sales and service is provided by a global dealer network of 865 independently owned companies in 75 countries.

[europe.thermoking.com](http://europe.thermoking.com)    [thermoking.com](http://thermoking.com)    [ingersollrand.com](http://ingersollrand.com)



For further information please contact: